

## Specification sheet

# Diesel generator set QSK78 series engine

2750kVA - 3000kVA 50 Hz



### Description

This Cummins® Power Generation commercial generator set is a fully integrated power generation system, providing optimum performance, reliability, and versatility for stationary standby, prime power, and continuous duty applications.

### Features

**Cummins® heavy-duty engine** - Rugged 4-cycle industrial diesel delivers reliable power, low emissions and fast response to load changes.

#### **Permanent magnet generator (PMG) -**

Offers enhanced motor starting and fault clearing short circuit capability.

**Alternator** - Several alternator sizes offer selectable motor starting capability with low reactance 2/3 pitch windings; low waveform distortion with non-linear loads, fault clearing short-circuits capability, and class F or H insulation.

**Cooling system** – Optional remote mounted cooling system, designed and tested for rated ambient temperatures, offers maximum flexibility for facility design requirements.

**Control system** – Standard PowerCommand® electronic control provides total system integration including remote start/stop, precise frequency and voltage regulation, alarm and status message display, AmpSentry protection, output metering, auto-shutdown.

**Warranty** - Backed by a comprehensive warranty and worldwide distributor network.

| Model           | Standby rating    | Prime rating      | Continuous rating | Emissions Compliance | Controller | Data sheets |
|-----------------|-------------------|-------------------|-------------------|----------------------|------------|-------------|
|                 | 50 Hz<br>kVA (kW) | 50 Hz<br>kVA (kW) | 50 Hz<br>kVA (kW) | EPA and<br>TA LUFT   |            |             |
| <b>C2750 D5</b> | 2750 (2200)       | 2500 (2000)       | 2250 (1800)       | 4g TA LUFT           | 3.3        | DS352-CPGK  |
| <b>C3000 D5</b> | 3000 (2400)*      | 2750 (2200)       | 2475 (1980)       | 4g TA LUFT           | 3.3        | DS335-CPGK  |

\*Note: Rating is with a remote cooled configuration

## Generator set specifications

|   |  |
|---|--|
| Governor regulation                                   | ISO 8528 G2  |
| Steady state voltage regulation, no load to full load | ± 0.25%  |
| Steady state frequency variation                      | ± 0.25%  |
| Frequency regulation                                  | Isochronous  |
| EMC compatibility                                     | Radiated emissions to BS EN 61000-6.3<br>Conducted immunity to BS EN 61000-6.2 |

## Engine specifications

|                             |  |
|-----------------------------|--|
| Design                      | 4 cycle, V, turbo charged and low temperature after-cooled                           |
| Bore                        | 170  |
| Stroke                      | 190  |
| Displacement                | 77.6 L (4735 in <sup>3</sup> )   |
| Cylinder block              | Cast iron, 18 cylinder   |
| Battery capacity            | 2200 amps  |
| Battery charging alternator | 55 amps  |
| Starting voltage            | 24-volt, negative ground   |
| Fuel system                 | Direct injection: number 2 diesel fuel, fuel filter, automatic electric fuel shutoff |
| Fuel filter                 | Triple element, 10 micron filtration, spin on fuel filter with water separator       |
| Air cleaner type            | Dry replaceable element  |
| Lube oil filter type(s)     | Four spin-on, combination full flow and bypass filters                               |
| Cooling system              | 104 °F (40 °C) ambient   |

## Alternator specifications

|                                       |  |
|---------------------------------------|--|
| Design                                | Brushless, 4 pole, drip-proof revolving field              |
| Stator                                | 2/3 pitch  |
| Rotor                                 | 2 bearing, flexible coupling                               |
| Insulation system                     | Class H on low and medium voltage, Class F on high voltage |
| Standard temperature rise             | 150 °C standby   |
| Exciter type                          | PMG (Permanent magnet generator)                           |
| Phase rotation                        | A (U), B (V), C (W)  |
| Alternator cooling                    | Direct drive centrifugal blower fan                        |
| AC waveform total harmonic distortion | No load <1.5%. Non distorting balanced linear load <3%     |
| Telephone influence factor (TIF)      | < 50 per NEMA MG1-22.43                                    |
| Telephone harmonic factor (THF)       | < 2%   |

## Available voltages

| 50 Hz line - neutral / line - line |              |
|------------------------------------|--------------|
| • 220/380                          | • 1905/3300  |
| • 230/400                          | • 3810/6600  |
| • 240/416                          | • 6350/11000 |
| • 255/440                          |              |

## Generator set options

|  |   |   |
|--|---|---|
| <p><b>Engine</b></p> <ul style="list-style-type: none"> <li><input type="checkbox"/> Water jacket heater 220/240 V</li> <li><input type="checkbox"/> Centiinel</li> <li><input type="checkbox"/> Eliminator</li> <li><input type="checkbox"/> Pre-lube system</li> </ul> <p><b>Alternator</b></p> <ul style="list-style-type: none"> <li><input type="checkbox"/> Alternator heater</li> <li><input type="checkbox"/> High humidity isolation</li> <li><input type="checkbox"/> Exciter voltage regulator (PMG)</li> <li><input type="checkbox"/> Temperature sensor – RTDs</li> <li><input type="checkbox"/> Temperature sensor – alternator bearing RTD</li> <li><input type="checkbox"/> Differential current transformers</li> <li><input type="checkbox"/> Exciter voltage regulator (PMG)</li> <li><input type="checkbox"/> 80 °C – 150 °C temperature rise</li> </ul> | <p><b>Generator set</b></p> <ul style="list-style-type: none"> <li><input type="checkbox"/> Vibration isolators</li> <li><input type="checkbox"/> Batteries</li> <li><input type="checkbox"/> Battery charger</li> </ul> <p><b>Control panel</b></p> <ul style="list-style-type: none"> <li><input type="checkbox"/> PowerCommand 3.3</li> <li><input type="checkbox"/> Paralleling</li> <li><input type="checkbox"/> Multiple language support</li> <li><input type="checkbox"/> 240 V control anti-condensation</li> </ul> <p><b>Exhaust system</b></p> <ul style="list-style-type: none"> <li><input type="checkbox"/> Industrial silencer</li> <li><input type="checkbox"/> Residential silencer</li> <li><input type="checkbox"/> In-line or side entry options</li> <li><input type="checkbox"/> Accessories</li> </ul> | <p><b>Cooling system</b></p> <ul style="list-style-type: none"> <li><input type="checkbox"/> Antifreeze 50/50 (Ethylene glycol)</li> <li><input type="checkbox"/> Radiator, 40 °C ambient</li> <li><input type="checkbox"/> Radiator, 50 °C ambient</li> <li><input type="checkbox"/> Remote cooling</li> <li><input type="checkbox"/> Fuel cooler, 40 ° ambient</li> <li><input type="checkbox"/> Fuel cooler, 50 °C ambient</li> </ul> <p><b>Generator set</b></p> <ul style="list-style-type: none"> <li><input type="checkbox"/> 10 years for major components</li> <li><input type="checkbox"/> 5 years for standby application</li> <li><input type="checkbox"/> 2 years for prime application</li> </ul> |
|--|---|---|

\*Note: Some options may not be available on all models - consult factory for availability.

## PowerCommand® 3.3 control system



### Control system

The PowerCommand® control system is an integrated microprocessor based generator set control system providing voltage regulation, engine protection, alternator protection, operator interface and isochronous governing.

**AmpSentry** – Includes integral AmpSentry protection, which provides a full range of alternator protection functions that are matched to the alternator provided.

**Power management** – Control function provides battery monitoring and testing features and smart starting control system.

**Advanced control methodology** – Three phase sensing, full wave rectified voltage regulation, with a PWM output for stable operation with all load types.

**Communications interface** – Control comes standard with PCCNet and Modbus interface.

**Regulation compliant** – Prototype tested: UL, CSA and CE compliant.

**Service** - InPower™ PC-based service tool available for detailed diagnostics, setup, data logging and fault simulation.

**Reliable design** – The control system is designed for reliable operation in harsh environment.

### Multi-language support

### Operator panel features

**Operator panel features** – The operator panel, in addition to the alternator, displays the Utility/AC Bus data.

### Operator/display functions

- 320 x 240 pixels graphic LED backlight LCD
- Auto, manual, start, stop, fault reset and lamp test/panel lamp switches
- Alpha-numeric display with pushbuttons
- LED lamps indicating genset running, remote start, not in auto, common shutdown, common warning, manual run mode, auto mode and stop

### Paralleling control functions

- Digital frequency synchronization and voltage matching
- Isochronous kW and kvar load sharing controls
- Droop kW and kvar control
- Sync check
- Extended paralleling (Peak Shave/Base Load)
- Digital power transfer control (AMF) provides load transfer operation in open or closed transition or soft (ramping) transfer mode

### Alternator data

- Line-to-neutral and line-to-line AC volts
- 3-phase AC current
- Frequency
- kW, kvar, power factor kVA (three phase and total)

### Engine data

- DC voltage
- Engine speed
- Lube oil pressure and temperature
- Coolant temperature
- Comprehensive FAE data (where applicable)

### Other data

- Genset model data
- Start attempts, starts, running hours, kW hours
- Load profile (operating hours at % load in 5% increments)
- Fault history
- Data logging and fault simulation (requires InPower)

### Standard control functions

#### Digital governing (optional)

- Integrated digital electronic isochronous governor
- Temperature dynamic governing

#### Digital voltage regulation

- Integrated digital electronic voltage regulator
- 3-phase, 4-wire line-to-line sensing
- Configurable torque matching

#### AmpSentry AC protection

- AmpSentry protective relay
- Over current and short circuit shutdown
- Over current warning
- Single and three phase fault regulation
- Over and under voltage shutdown
- Over and under frequency shutdown
- Overload warning with alarm contact
- Reverse power and reverse var shutdown
- Field overload

#### Engine protection

- Battery voltage monitoring, protection and testing
- Over speed shutdown
- Low oil pressure warning and shutdown
- High coolant temperature warning and shutdown
- Low coolant level warning or shutdown
- Low coolant temperature warning
- Fail to start (over crank) shutdown
- Fail to crank shutdown
- Cranking lockout
- Sensor failure indication
- Low fuel level warning or shutdown
- Fuel-in-rupture-basin warning or shutdown
- Full authority electronic engine protection

#### Control functions

- Time delay start and cool down
- Real time clock for fault and event time stamping
- Exerciser clock and time of day start/stop
- Data logging
- Cycle cranking
- Load shed
- Configurable inputs and outputs (4)
- Remote emergency stop

#### Options

- Auxiliary output relays (2)

**Emergency standby power (ESP):**

Applicable for supplying power to varying electrical load for the duration of power interruption of a reliable utility source. Emergency Standby Power (ESP) is in accordance with ISO 8528. Fuel Stop power in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

**Limited-time running power (LTP):**


Applicable for supplying power to a constant electrical load for limited hours. Limited Time Running Power (LTP) is in accordance with ISO 8528.

**Prime power (PRP):**

Applicable for supplying power to varying electrical load for unlimited hours. Prime Power (PRP) is in accordance with ISO 8528. Ten percent overload capability is available in accordance with ISO 3046, AS 2789, DIN 6271 and BS 5514.

**Base load (continuous) power (COP):**

Applicable for supplying power continuously to a constant electrical load for unlimited hours. Continuous Power (COP) in accordance with ISO 8528, ISO 3046, AS 2789, DIN 6271 and BS 5514.

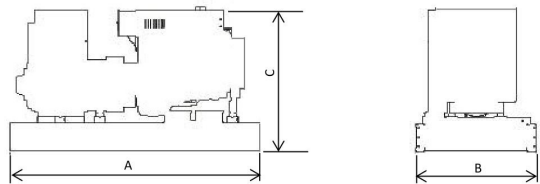

This outline drawing is to provide representative configuration details for Model series only.

See respective model data sheet for specific model outline drawing number.

**Do not use for installation design**

**Weight and dimensions**

| Model           | Dim "A"<br>mm | Dim "B"<br>mm | Dim "C"<br>mm | Set Weight*<br>dry kg | Set Weight*<br>wet kg |
|-----------------|---------------|---------------|---------------|-----------------------|-----------------------|
| <b>C2750 D5</b> | 5670          | 2989          | 3197          | 17715                 | 18311                 |
| <b>C3000D5</b>  | 5670          | 2989          | 3197          | 17994                 | 18590                 |

\* **Note:** Weights represent a set with standard features. See outline drawings for weights of other configurations.

**Certifications**



This generator set is designed in facilities certified to ISO 9001 and manufactured in facilities certified to ISO 9001 or ISO 9002.



This generator set is available with CE certification.



This generator set has been designed to comply with ISO 8528 regulation.

Authorised Representative



**QNG Co., Ltd.**

A : 1L Street No. 18B, Binh Hung Hoa A, Binh Tan, HCMC  
T : 028.36363724 | F : 028.36363714 | www.qng.com.vn

**Cummins Power Generation Offices**

- Bengaluru: Tel.: (080) 2325 9161 / 63, 2325 9165 / 67  
Fax: (080) 2325 9164
- Chandigarh: Tel.: (0172) 224 0371-73  
Fax: (0172) 224 0372
- Chennai: Tel.: (044) 2446 8110 / 2446 8113  
Fax: (044) 2491 1120
- Gurgaon: Tel.: (0124) 391 0900-01  
Fax: (0124) 391 0916
- Hyderabad: Tel.: (040) 2340 9970 / 2340 9980  
Fax: (040) 2340 9990
- Jaipur: Tel.: (0141) 236 4944  
Fax: (0141) 403 8794
- Kolkata: Tel.: (033) 2287 8065 / 2287 2481  
Fax: (033) 2290 3839
- Lucknow: Tel.: (0522) 230 5049 / 230 5059  
Fax: (0522) 230 5035
- Mohali: Tel.: (0172) 224 0371 / 72 / 73  
Fax: (0172) 224 0371 / 72 / 73
- Vadodara: Tel.: (0265) 233 0627 / 3053627  
Fax: (0265) 234 0623



Visit our facebook page at :  
Cummins Power Generation India



**"Our energy working for you."**

© 2015 Cummins Power Generation Inc. All rights reserved.

Cummins Power Generation and Cummins are registered trademarks of Cummins Inc. PowerCommand, AmpSentry, InPower and are trademarks of Cummins Power Generation. Other company product or service names may be trademarks or service marks of others. Specifications are subject to change without notice. PGBU/001/QSK 78 2750-3000 kVA/SA/NM/August 2015



**Cummins India Limited  
Power Generation Business Unit**  
Cummins India Office Campus  
Tower-A, 6<sup>th</sup> Floor, S. No. 21,  
Balewadi, Pune – 411 045 (India)  
Email: cpindia@cummins.com  
www.cumminsindia.com