

QGS - 1.125 | INDUSTRIAL RANGE POWER BY CUMMINS



■ Model: QGS - 1.125

Powered by CUMMINS



■ Generator Specification

Service	PRP ⁽¹⁾	ESP ⁽²⁾
Power (kVA)	1125	1250
Power (kW)	900	1000
Rated speed (r.p.m)	1500	
Standard voltage (V)	400/230V	
Rated at power factor(cos phi)	0.8	



QNG Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery safety.
- 2006/95/EC Low voltage
- EN 60204-1: 2006+A1: 2009, EN ISO 12100: 2010, EN ISO 13849-1: 2008, EN 12601 : 2010

(1) PRP (Prime Power):

According to ISO8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

(2) ESP (Standby Power):

According to ISO 8528-1, It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. No overload capability is available.


Powers Voltage (V)	ESP KVA	ESP KW	PRP KVA	PRP KW	Standby Amps
415/240	1250	1000	1125	900	1739.1
400/230	1250	1000	1125	900	1804.3
380/220	1250	1000	1125	900	1899.2

Performance Data

Model	QGS - 1.125	
Engine brand	Cummins	
Engine model	KTA38G9	
Speed control type	Electronic	
Phase	3	
Control system	Digital	
Starter motor voltage	24V	
Frequency	50HZ	
Engine speed (RPM)	1500	
Fuel Consumption (L/H)	100% standby power	256
	100% prime power	232
	75% prime power	174
	50% prime power	116

Standard reference Conditions

Note: Standard reference condition 25°C (77°F) air inlet temp, 100m(328ft) A.S.L 30% relative humidity. Fuel consumption dat with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998, Class A2



Dimension and Weight

Dimension	Open	Silent
Length (L)	4340mm	6058mm
Width (W)	2030mm	2438mm
Height (H)	2165mm	2591mm
Net Weight	7450KG	/
Fuel Tank (L)	/	/

■ Engine Specification: KTA38G9

Basic technical data

No. of cylinders	12
Cylinder arrangement	60° Vee
Cycle	4 stroke
Induction system	Turbocharged&Aftercooled
Compression ratio	13.9:1
Bore	159mm
Stroke	159mm
Displacement	37.8L
Engine idle speed	725-775 RPM

Cooling system

Coolant capacity-engine	124L
Maximum coolant friction head external to engine:	
-1800 rpm	/
-1500 rpm	48 KPA
Maximum static head of coolant above engine crank centerline	18.3m
Standard Thermostat (Modulating) Range	82 -93℃
Minimum Pressure Cap	69 KPA
Maximum Top Tank Temperature for Standby / Prime Power	/

Fuel system

Injection system	Cummins PT
Governor type	Electronic
Maximum Fuel Flow to Injection Pump	428L/H
Maximum fuel inlet temperature	70℃
Maximum Allowable Head on Injector Return Line (Consisting of Friction Head and Static Head)	165mm Hg

Air intake system

Maximum intake air restriction with heavy duty air cleaner:

-Dirty element	25 in H ₂ O
-Clean element	15 in H ₂ O

Lubrication system

Engine oil pressure for engine protection devices:

— Idle speed(Minimum)	138kPa
— Governed speed(Maximum)	310-448kPa

Maximum oil temperature	121 ℃
-------------------------	-------

Oil Capacity with OP6023 Oil Pan:

Low - High	114-87 L
------------	----------

Electrical system

Cranking motor (Heavy duty, positive engagement

	24V
--	-----

Battery charging system,

negative ground	35 ampere
-----------------	-----------

Maximum allowable resistance

of cranking circuit	0.002 ohm
---------------------	-----------

Minimum recommended battery

capacity- cold soak	1800 CCA
---------------------	----------

General installation

Prime power

Gross engine power output	1089kWm
---------------------------	---------

Piston speed	7.9m/s
--------------	--------

Friction horsepower	86kWm
---------------------	-------

Intake air flow	1309L/S
-----------------	---------

Exhaust gas flow	3540L/S
------------------	---------


Exhaust gas temperature	529℃
-------------------------	------

Radiated heat to ambient	154kWm
--------------------------	--------


Heat rejection to Exhaust	652kWm
---------------------------	--------

■ Alternator Specification


Alternator	
Number of phase	3
Power factor (Cos Phi)	0.8
Poles	4
Winding Connections (standard)	Star-serie
Terminals	12
Insulation type	H class
Winding Pitch	2/3
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Couping	Flexible disc

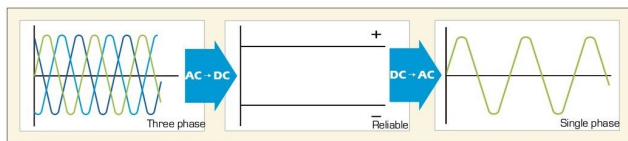

Emergency voltage curve

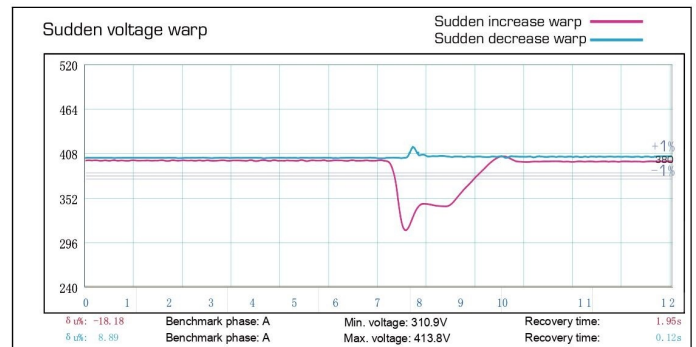

Emergency frequency curve

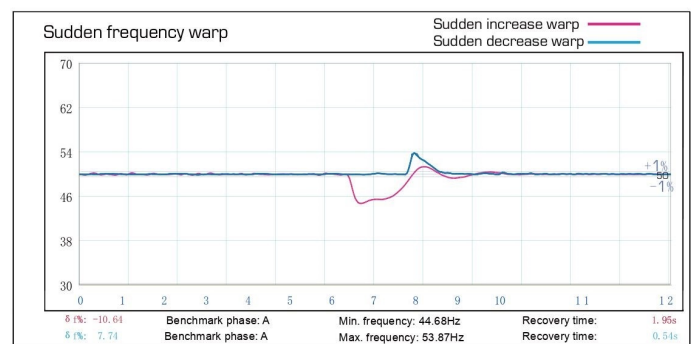

■ Options

Engine	Alternator	Generator Sets	Fuel System
<ul style="list-style-type: none"> Water Jacket Pre-heater Fuel heater 	<ul style="list-style-type: none"> Winding Temp measuring Instrument Alternator Pre-heater PMG Anti-damp and anti-corrosion treatment Anti-condensation heater Winding and bearing RTD 	<ul style="list-style-type: none"> Tools with the machine Extended range fuel tank Bunded fuel tank 	<ul style="list-style-type: none"> Low fuel level alarm Automatic fuel feeding system Fuel T-valves
Canopy	Lub oil system	Cooling System	Control Panel
<ul style="list-style-type: none"> Rental type Canopy Trailer 	<ul style="list-style-type: none"> Oil Pre-heater Oil temp sensor 	<ul style="list-style-type: none"> Front heat protection 	<ul style="list-style-type: none"> Remote control panel ATS Synchronizing controller Adjustable earth leakage relay

QGS - 1.125 | INDUSTRIAL RANGE POWER BY CUMMINS



■ Control Panel

Configuration

- Emergency stop button
- Protection MCB
- Battery charger
- Integrated aviation plug
- ATS connection
- Digital control module

Features

- 3 phase generator set monitoring
- Support of engines equipped with electronic control unit
- Comprehensive diagnostic message
- Automatic or manual start/stop of the gensets
- Push buttons for simple control, lamp test
- Graphic back-lit LCD display
- Parameters adjustable via keyboard or PC
- Mains measurements (50HZ/60HZ)
- Generator measurements (50HZ/60HZ)
- Comprehensive shutdown or warning on fault condition
- 3 phase Generator protections
 - Over-/under voltage
 - Over-/under frequency
 - Current/voltage asymmetry
 - Over current/overload
- 3 phase AMF function
 - Over-/under frequency
 - Over-/under voltage
 - Voltage asymmetry
- Configurable analog inputs
- Battery voltage, engine speed (pick-up) measurement
- Configurable programmable binary inputs and outputs
- Warm-up and cooling functions
- Generator C.B. and Mains C.B. control with feedback and return timer
- RS232 interface
- Modem communication support
- Hours counter
- Sealed to Ip65
- Event log

Benefits

- Less wiring and components
- Integrated solution
- Less engineering and programming
- User friendly set-up and button layout
- Module can be configured to suit individual applications
- PC software for simplified configuration
- Wide range of communication capabilities

Operation conditions

- Operation temp: -20 °C to + 70 °C
- Storage temp: -30 °C to + 80 °C
- Operating humidity: 95% w/o condensation
- Vibration : 5-25Hz, ± 1.6 mm
5-100Hz, $a=4g$
- Shocks: $a= 500m/s^2$

Options

- Ethernet interface (Remote monitoring and control)
- GSM modem/wireless internet (Remote monitoring and control)
- RS232-RS485 Dual port interface
- Synchronizing control panel
- Distribution board with sockets kit and power busbar
- Battery trickle charge ammeter
- Earth leakage protection
- Earth fault protection
- Low fuel level alarm
- Low fuel level shutdown
- High fuel level alarm
- Fuel transfer system control
- Low coolant level shutdown
- High lube oil temp shutdown
- Overload via alarm switch on breaker
- Engine coolant heater controls
- Control panel heater
- Speed adjust switch
- Oil temp displayed on LCD screen
- Additional 8 inputs and outputs



QNG Co., Ltd
1L Street No. 18B, Binh Hung Hoa A, Binh Tan, Ho Chi Minh, Vietnam
info@qng.com.vn www.qng.com.vn